

MULTIQUIP'S Trusted 6" Diesel Trash Pump Series Powerful Dewatering Solutions

The Multiquip MQ62TKT Trash Pump - is the perfect choice for demanding dewatering applications. The trusted MQ pump-end produces exceptional flow rates, easily handles high debris laden water, and maintains long operating life due to the strength of its industrial engineered casings and components.




DOT/NHSTA approved trailer
Made in the U.S.A.

- **Trusted Diesel Power Systems** - the MQ62 is driven by a powerful Tier IV (F) KOHLER diesel engine that meets all EPA/CARB environmental requirements. A rugged LOFA™ Control Box, throttle assembly and high quality RACOR® in-line fuel/water separator support engine operations.
- **Industrial Grade Pump Body** - industrial (#30) grey iron casings ensure abrasion resistance and high tolerances to pressure demands. Left and right side discharge option. Easy clean-out casing chamber.
- **Specially Engineered Volute and Impeller** - easily removable, double passage design ensures the fastest priming actions, minimal clogging, and improved flow efficiency.
- **PRO Constructed Mechanical Seal System** - the pump is supported by a lubricated double floating self-aligning seal design. The rotating and stationary seal faces are made of tungsten titanium carbide for heat and abrasion resistance.

MQ62TKT

6" Suction/Discharge • 1,190 GPM Flow
111' Head • Moves up to 3" Solids
Kohler KDW 1404 24.3HP Diesel Engine
28 GAL Fuel Tank

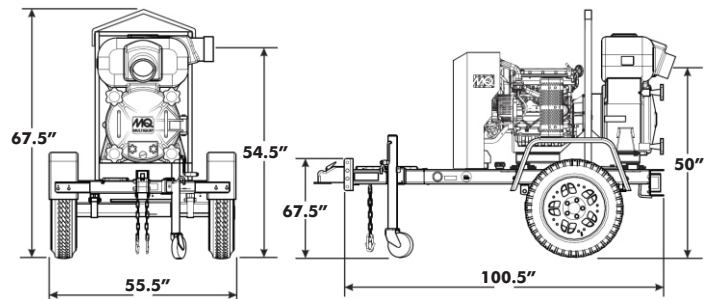

Accessory Options: Q/D Hose

Accessory Options: NPT Threaded Hose

6" Suction Hose
Part: HSQ625



Pump Port Q/D Male Coupler
Part: A600A

6" Discharge Hose
Part: HDQ650

6" Suction Hose
Part: HS620



6" Discharge Hose
Part: HD650

**PROVEN DEWATERING PUMPS
POWERFUL - EFFICIENT - TRUSTED**



Contact your local Multiquip District Manager: 800-421-1244

www.multiquip.com
800-421-1244


MULTIQUIP'S Trusted 6" Diesel Trash Pump Series Powerful Dewatering Solutions

The perfect combination of trusted industrial 6" pump-end and efficient EPA/CARB certified Tier IV (F) diesel engine.



KOHLER KDW 1404 DIESEL ENGINE

ENGINE TYPE	LIQUID COOLED
CYLINDERS	4
RPM	2,700
HP	24.5
OIL CAPACITY	3.2 QTS.
OIL CONSUMPTION	.02 QTS/HR
LUBRICATION	FULL PRESSURE W/FULL-FLOW FILTER
FUEL CONSUMPTION	1.5 GAL/HR
FUEL CAPACITY - MQ62TKT	28 GAL
MQ62TKT RUN TIME	18.7 HRS
FUEL CAPACITY - MQ62TKT	28 GAL
MQ62TKT RUN TIME	18.7 HRS

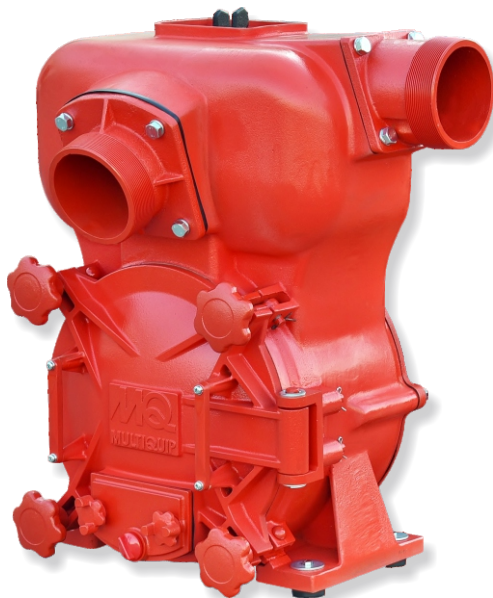

MULTIQUIP 6" TRASH PUMP-END

FLOW RATE	1,190 GAL
HEAD	111'
PSI	48
CASING MATERIAL	#30 GRAY IRON
IMPELLER MATERIAL	#45 DUCTILE IRON
VOLUTE MATERIAL	#45 DUCTILE IRON
MECHANICAL SEAL	TUNGSTEN TITANIUM CARBIDE - OIL LUBRICATED DOUBLE FLOATING SELF- ALIGNING.
DISCHARGE PORT	6" #30 GRAY IRON
SUCTION PORT	6" #30 GRAY IRON

**PROVEN DEWATERING PUMPS
POWERFUL - EFFICIENT - TRUSTED**



Contact your local Multiquip District Manager: 800-421-1244

www.multiquip.com
800-421-1244